

### FEATURES


- GaAs active devices
- Power gain @25dB
- Low distortion
- Excellent linear gain
- Low noise figure
- High reliability
- Low cost

### DESCRIPTION

The SMG1025 is a GaAs hybrid push-pull amplifier module. The part employs GaAs dies and is operated from 50 MHz to 1000MHz with supply voltage +24V( DC)

### OUTLINE

PIN CONFIGURATION

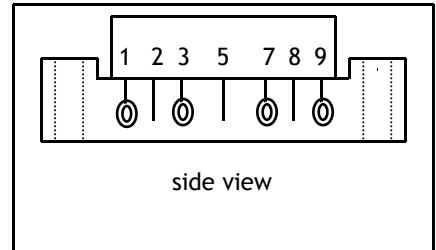

### Pin Description

1	Input
5	+V <sub>B</sub>
9	Output
2、3、7、8	GND

### QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNITS
G <sub>p</sub>	Power Gain	f=50 MHz	25	26.5	dB
I <sub>tot</sub>	Total current consumption(DC)	V <sub>B</sub> =24V	250	330	mA

### SANLAND TECHNOLOGY

·Tel: 86-0755-28968333  
 ·Fax: 86-0755-89724455  
 ·2021.3

·Http: [www.sanlandtech.com](http://www.sanlandtech.com)  
 ·E-mail: [info@sanlandtech.com](mailto:info@sanlandtech.com)

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System

SYMBOL	PARAMETER	MIN.	MAX.	UNITS
$V_i$	RF input voltage	-	50	dBmV
$T_{stg}$	Storage temperature	-40	+100	°C
$T_{mb}$	Operating mounting base temperature	-20	+90	°C

### CHARACTERISTICS

(Bandwidth 50 to 1000MHz;  $T_{mb}=25^{\circ}\text{C}$ ,  $V_B=24\text{V}$ ,  $Z_S=Z_L=75\Omega$ )

SYMBOL	PARAMETER	UNIT	MIN.	TYP.	MAX.	CONDITIONS
$G_p$	Power Gain	dB	25	-	26.5	f=50MHz
SL	Slope cable equivalent	dB	0.5	1.5	2.5	f=50 to 1000 MHz
FL	Flatness of frequency response	dB	-	-	±0.5	f=50 to 1000 MHz
S11&S22	Input & output return loss	dB	-	-	-16	f=50 to 860 MHz
		dB			-14	f=861 to 1000 MHz
CTB	Composite Triple Beat	dB	-	-	-62	PAL 60 channel; $V_o=44\text{dBmV}$ ;
CSO	Composite Second Order distortion	dB	-	-	-63	CTB measured at 543.25 MHz;
$X_{mod}$	Cross Modulation	dB	-	-	-55	CSO measured at 544.5 MHz;
$V_o$	Output Voltage	dBmV	60	-	-	$d_{im}=-60\text{dB}$
F	Noise Figure	dB	-	4.0	-	f=860 MHz
$I_{tot}$	Total Current Consumption	mA	250	330		$V_B=+24\text{V}$


The module normally operates at  $V_B=24\text{V}(\pm 0.5)$ ,

**SANLAND TECHNOLOGY**

·Tel: 86-0755-28968333  
 ·Fax: 86-0755-89724455  
 ·2021.3

·Http: [www.sanlandtech.com](http://www.sanlandtech.com)  
 ·E-mail: [info@sanlandtech.com](mailto:info@sanlandtech.com)

### MODULE DIMENSIONS

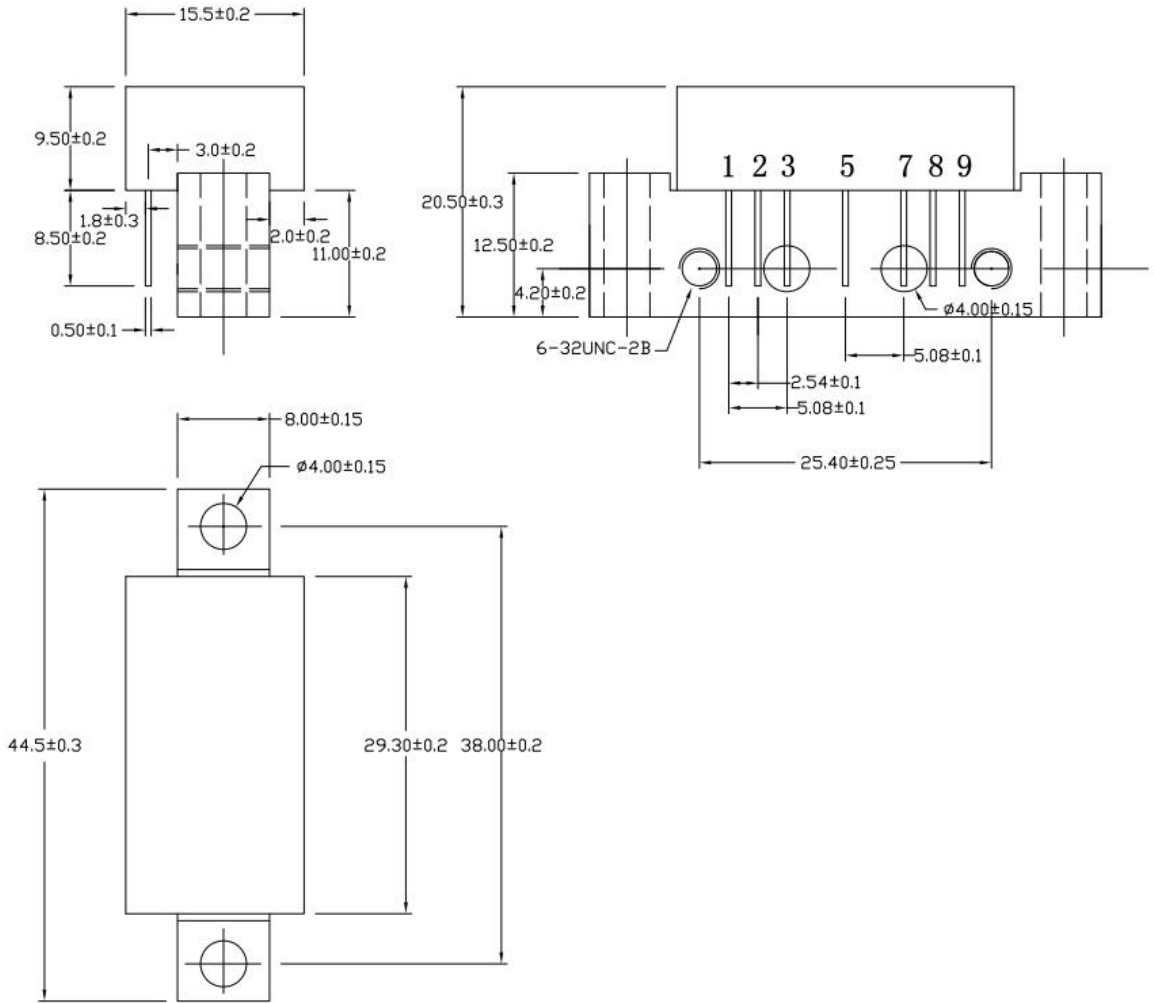

SANLAND TECHNOLOGY

·Tel: 86-0755-28968333  
·Fax: 86-0755-89724455  
·2021.3

·Http: [www.sanlandtech.com](http://www.sanlandtech.com)  
·E-mail: [info@sanlandtech.com](mailto:info@sanlandtech.com)